





granulators

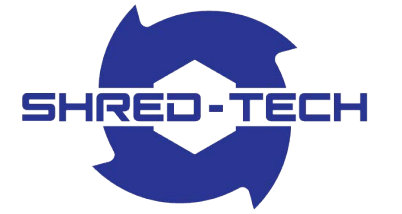

PRECISION GRANULATION

MG LINE

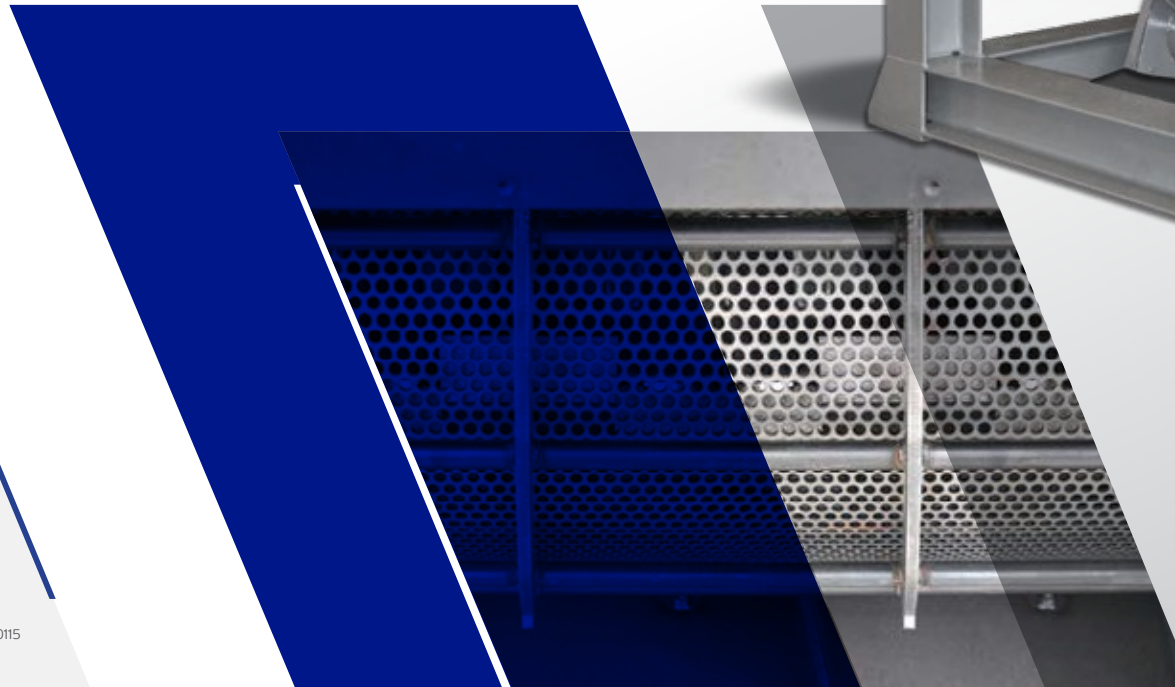

COMPLETE INFORMATION DESTRUCTION AND RECYCLING SOLUTIONS

www.shred-tech.com | shred@shred-tech.com

tf. 1.800.465.3214 | t. 519.621.3560 | f. 519.621.4288

Service Hotline: 1.877.566.2345



MG400 LINE

MG400/5 MG400/8 MG400/10

APPLICATIONS





Single stream or mixed plastics reduction of purgings, lumps, sprues, runners, tough fibres, thin films, plastic waste and rejects from injection and blow moulded processes.

PRECISION

Granulation

The MG-Line of granulators are designed to process blown films, thermoformed, roto-moulded and injection-moulded parts, extrusions, rubber products and more.

Standard features include shaft bearings mounted outside the chamber walls to prevent contamination, water jets for the cooling of materials with ultra-low melting points and high efficiency drives to name a few. The unique angle between the cutting blades and counter blades reduce fines and save energy. These are just a few of the features that make the MG-Line a versatile machine for all of your shredding needs.



MG400 LINE	MG400/5	MG400/8	MG400/10
Overall Dimensions l x w x h	1,600 x 1,050 x 1,500 mm 63 x 41 x 59 in	1,600 x 1,350 x 1,500 mm 63 x 53 x 59 in	1,650 x 1,550 x 1,700 mm 65 x 61 x 67 in
Cutting Chamber l x w	400 x 500 mm 15.75 x 19.7 in	400 x 800 mm 15.75 x 31.5 in	400 x 1,000 mm 15.75 x 39.37 in
Rotor Diameter	400 mm 15.75 in	400 mm 15.75 in	400 mm 15.75 in
Weight	2,800 kg 6,173 lbs	3,100 kg 6,834 lbs	4,050 kg 8,929 lbs
Motor	11 kW 15 HP	18.5 kW 25 HP	30 kW 40 HP
Blades	Integrated / Adjustable	Integrated / Adjustable	Integrated / Adjustable
Blade Thickness	15 mm 0.59 in	20 mm 0.79 in	30 mm 1.18 in

MG800 LINE	MG800/10	MG800/12	MG800/16	MG800/20
Overall Dimensions l x w x h	1,900 x 1,450 x 1,600 mm 74.8 x 57 x 63 in	1,900 x 1,650 x 1,600 mm 74.8 x 65 x 63 in	2,100 x 2,050 x 1,600 mm 82.6 x 80.7 x 63 in	2,200 x 2,450 x 1,700 mm 86.6 x 96.5 x 67 in
Cutting Chamber l x w	800 x 1,000 mm 31.5 x 39.37 in	800 x 1,200 mm 31.5 x 47.24 in	800 x 1,600 mm 31.5 x 63 in	800 x 2,000 mm 31.5 x 78.7 in
Rotor Diameter	800 mm 31.5 in	800 mm 31.5 in	800 mm 31.5 in	800 mm 31.5 in
Weight	3,300 kg 7,275 lbs	3,900 kg 8,598 lbs	5,800 kg 12,787 lbs	8,900 kg 19,621 lbs
Motor	75 kW 100 HP	90 kW 120 HP	110 kW 150 HP	160 kW 215 HP
Blades	Integrated / Adjustable	Integrated / Adjustable	Integrated / Adjustable	Integrated / Adjustable
Blade Thickness	30 mm 1.18 in	30 mm 1.18 in	40 mm 1.57 in	40 mm 1.57 in



MG800/10 MG800/12 MG800/16 MG800/20

MG800 LINE