

ST-400

2-SHAFT SHREDDER

High performance and versatility makes this model ideal for any shredding company.

The ST-400's applications include steel drums, auto and truck tires, castings, municipal and industrial waste, metals and various other applications. It does more, so you can DO MORE!

STANDARD FEATURES

▶ CUTTING CHAMBER

The ST-400 shredders are available in four large cutting chamber sizes, 46" x 53", 46" x 65", 46" x 76" and 46" x 87".

▶ KNIVES

Shred-Tech Engineers have designed each knife profile and configuration to suit the application for maximum throughput and optimum shred size.

▶ DRIVE SYSTEM

The ST-400 shredder is available with dual 75, 100 or 150HP electric motors.

▶ CONTROL PANEL

The ST-400 control panel, designed and fabricated by certified Shred-Tech technicians, features illuminated function buttons, keyed power switch, fused lockable disconnect, hour meter and a programmable logic controller for shredder functions, including knife reversal on overload.

▶ HOPPER AND STANDS


Quality is evident in the workmanship of Shred-Tech's extra heavy duty stand and hopper. As an option, the stand and hopper can be modified to suit the application or installation.

▶ HEX SHAFTS

The unique design of the machined hex shafts maximizes knife placement options and allows for easy knife removal and machine maintenance. Size for size, the hex shaft is several times stronger than a keyed shaft. The Shred-Tech hex shaft drive system offers the highest knife-tip cutting force of any comparable shredder on the market.



The ST-400 is designed for maximum use with a wide range of materials and optimum shred size.

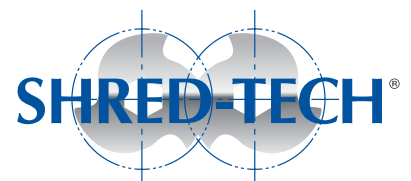



TECHNICAL SPECIFICATIONS	ST-400ES	ST-400E	ST-400EL	ST-400EXL
MEASUREMENTS				
M/C Length	168"	180"	190"	200"
M/C Width	77"	77"	77"	77"
M/C Height	160"	160"	160"	160"
M/C Weight	30,000 lbs	33,000 lbs	35,000 lbs	38,000 lbs
Floor Space (sq.ft.)	90	96	100	106
PRODUCT SPECIFICATIONS				
Drive	Electric	Electric	Electric	Electric
Number of Motors	2	2	2	2
Horsepower	150-300	150-300	150	150
Voltage	208-600	208-600	208-600	208-600
Hertz	50/60	50/60	50/60	50/60
Knife Thickness (STD)	1 1/2", 1 7/8", 2 1/2", 3"			
Number of Knives	35, 28, 22, 18	43, 34, 27, 22	50, 40, 31, 26	57, 46, 36, 30
Knife Diameter	22 3/4"	22 3/4"	22 3/4"	22 3/4"
Hex Size	7 or 8"	7 or 8"	7 or 8"	7 or 8"
Distance Between Shafts	17"	17"	17"	17"
Cutting Chamber	46"x53"	46"x65"	46"x76"	46"x87"
Discharge Height	80"	80"	80"	80"
Hopper Height	40"	40"	40"	40"
Stand Opening (width)	47"	47"	47"	47"
Stand Opening (length)	103"	118"	139"	151"

- OPTIONAL FEATURES**
- PLC Interfacing for Peripheral Equipment
 - Custom Stands and Hoppers
 - Feed and Discharge Conveyors
 - Pneumatic or Hydraulic Ram
 - Explosion Proof Motors
 - Modem Capabilities
 - Magnetic or Eddy Current Separators
 - Hydraulic Drive Options

MAINTENANCE

Several design refinements proven successful to increase ease of maintenance and shredder durability in Shred-Tech's model line up have been incorporated into the ST-400 shredder. The new cast steel body design, in combination with bulkhead walls and labyrinth barriers at either end of the cutting chamber provide excellent bearing and seal protection, and have resulted in superior durability and higher service factors.

Sectional cleaning fingers, which are removable from the top, and a light weight chamber plate ensures cutting chamber disassembly is quick and easy. Bearing and seal replacement is easily completed without the need of gearbox disassembly.




ST-400

2 - SHAFT SHREDDER

The ST-400 is designed for maximum use with a wide range of materials and optimum shred size.

SHRED-TECH
 COMPLETE INFORMATION DESTRUCTION AND RECYCLING SOLUTIONS
www.shred-tech.com | shred@shred-tech.com
 tf. 1.800.465.3214 | t. 519.621.3560 | f. 519.621.4288
 Service Hotline: 1.877.566.2345

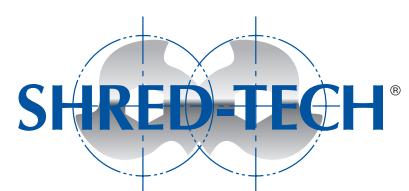

All Shred-Tech Shredders are available under US Federal Supply Contract.® All rights reserved. Shred-Tech and Shred-Tech logo are registered trademarks of Shred-Tech. Specs correct at press time, and may change without notice. 190318